
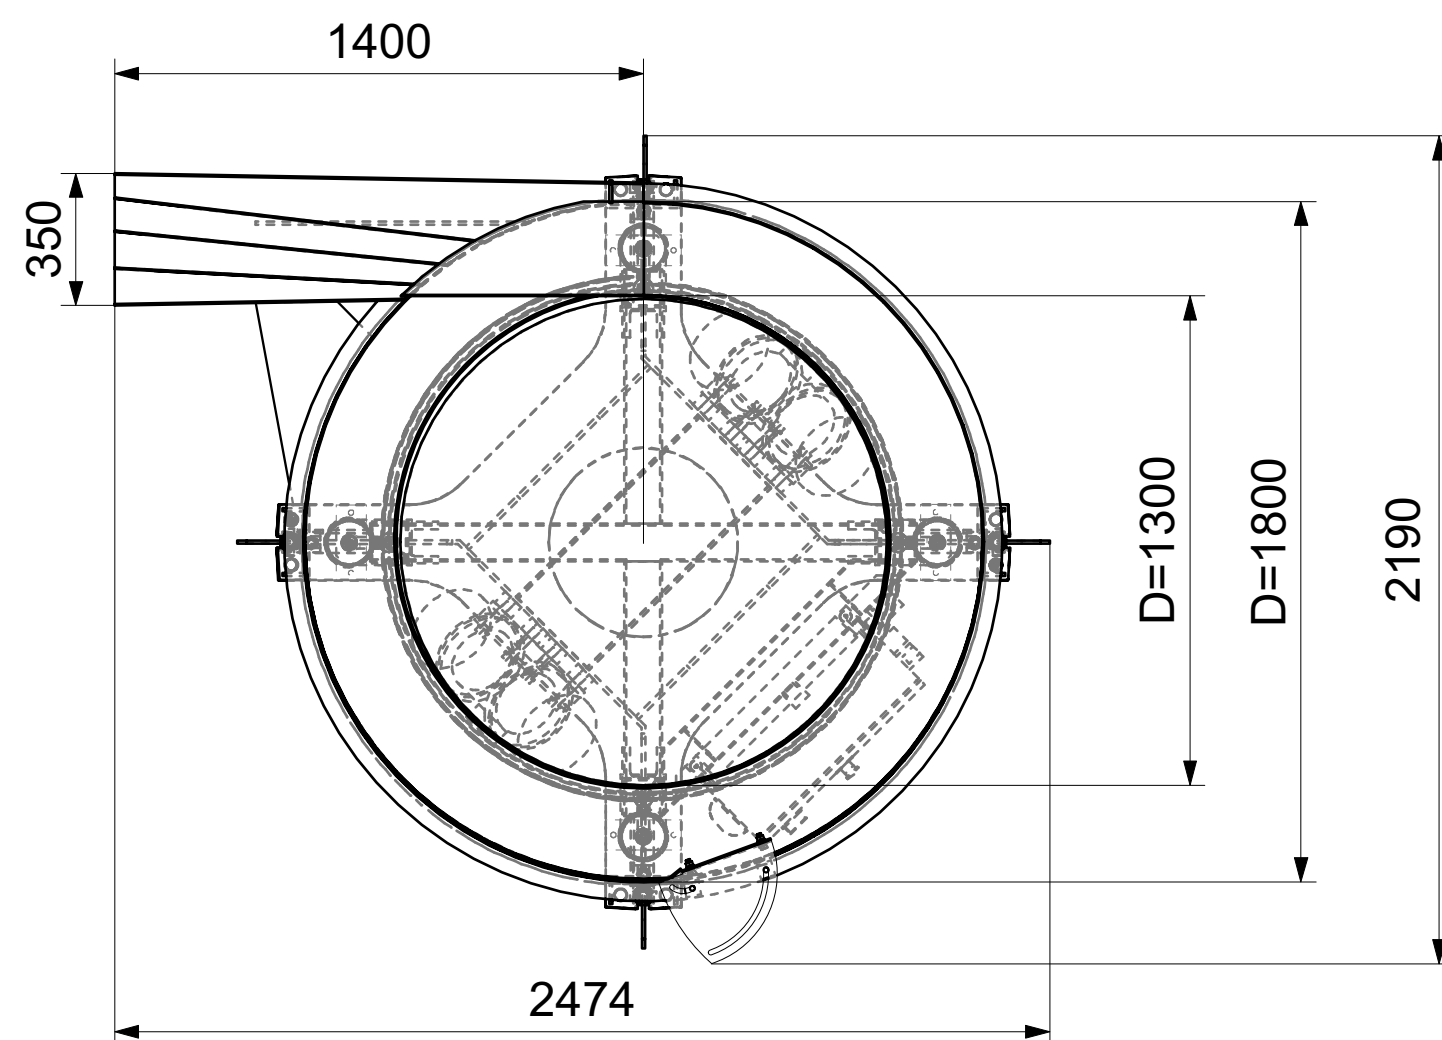
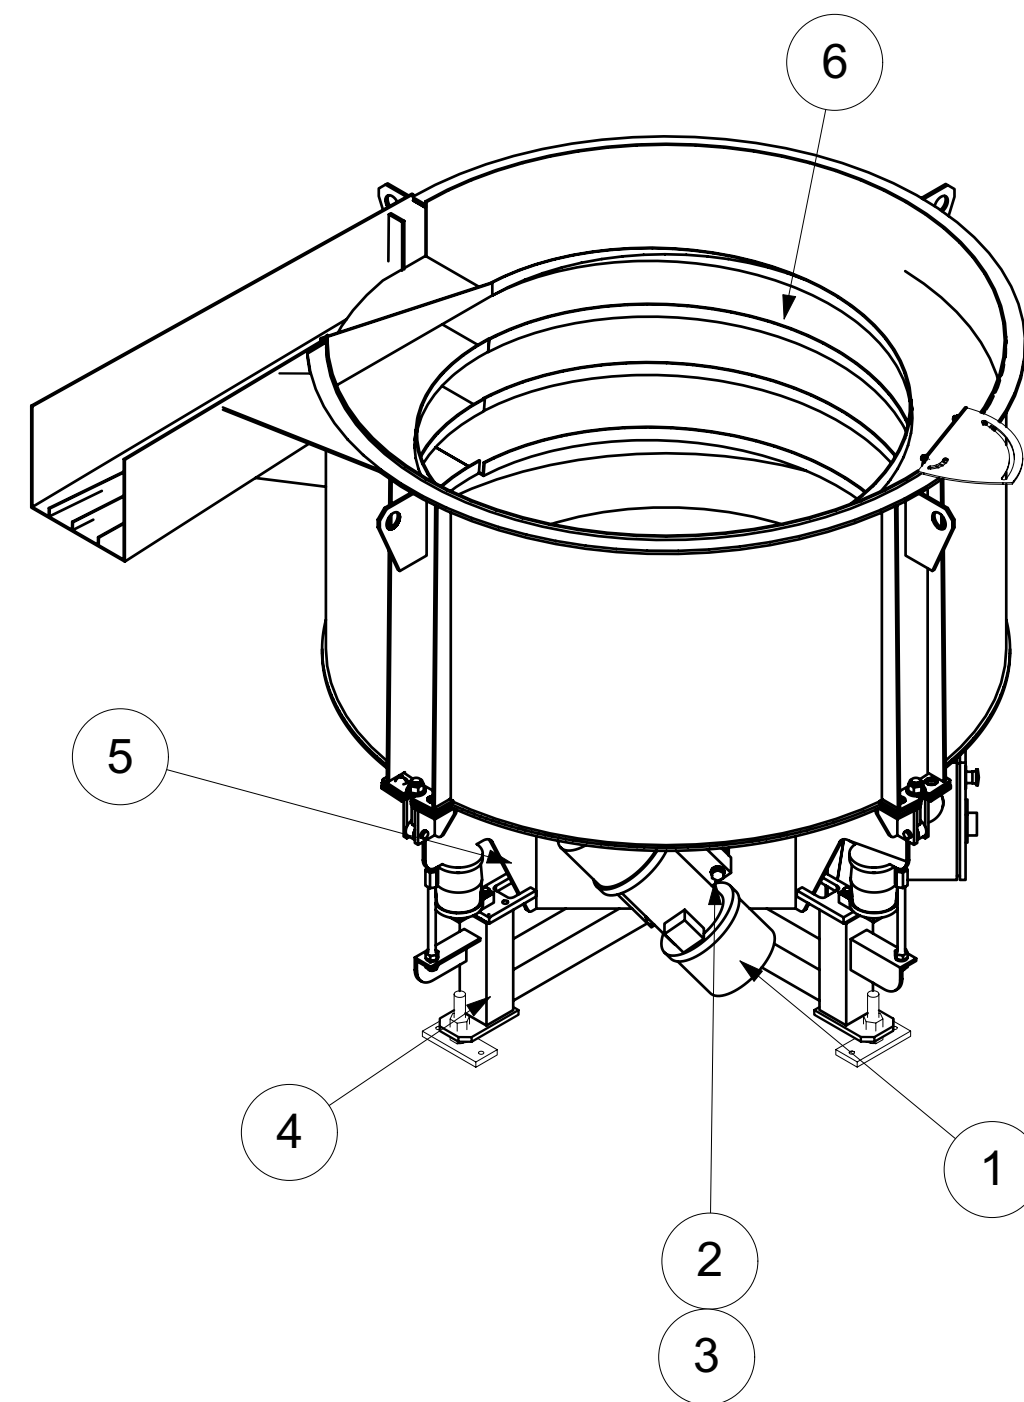
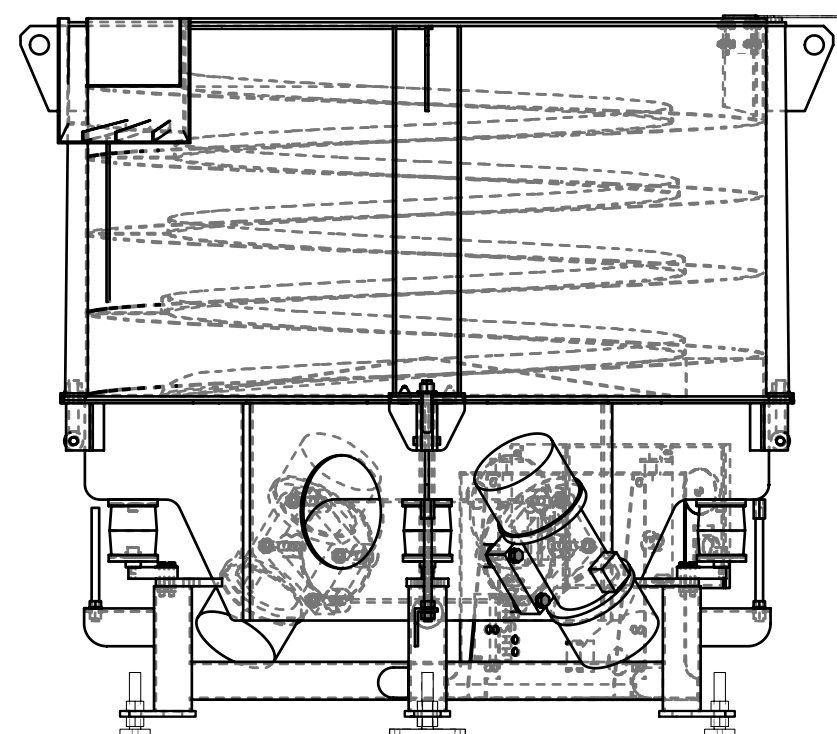


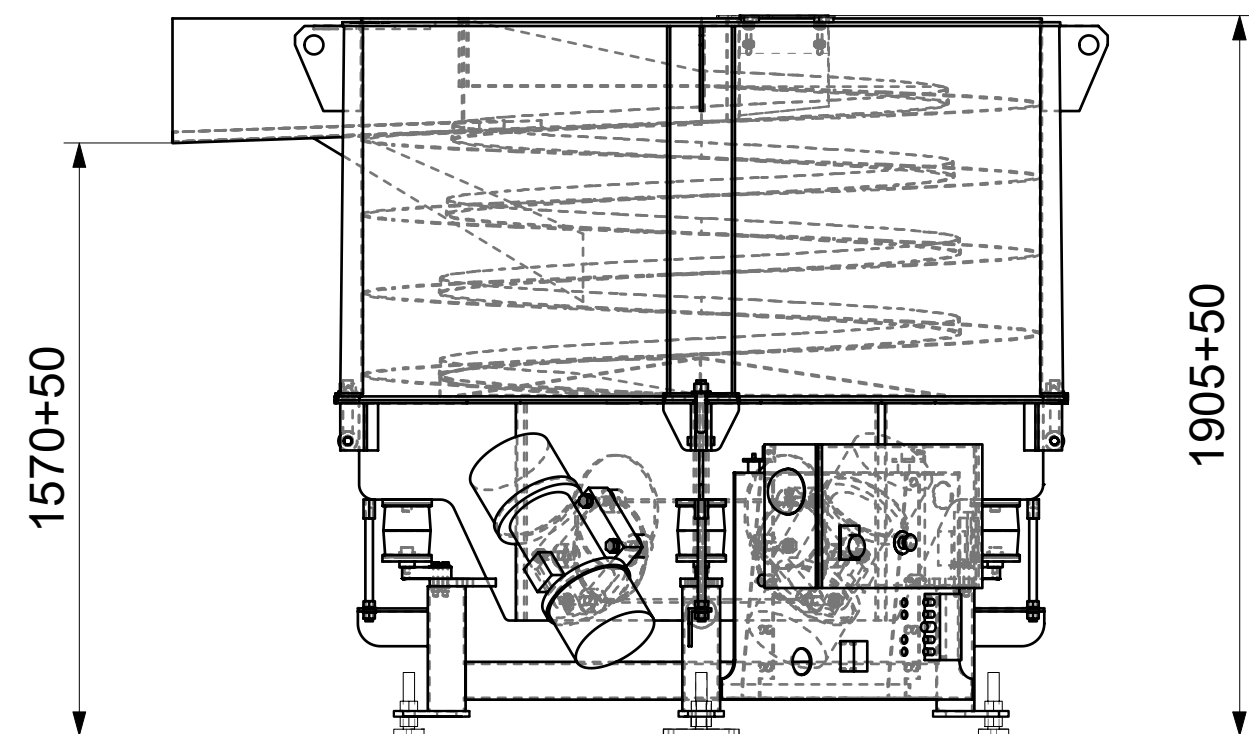

Doser volume: 2200 liter
Weight: 1250 kg
P=4,4 kW
400-575 V, 3 phase
50-60 Hz
25 Ampere fuse

A-WEIGHTED SOUND PRESSURE LEVEL
LpAd, IN DECIBELS, MEASURED AT 1.0 M
FROM MACHINE, RUNNING WITH LOAD: 78 dBA

VALUES DETERMINED ACCORDING TO NOISE TEST CODE GIVEN IN
EN-ISO 11202:G3, USING THE BASIC STANDARDS EN-ISO 11200, ISO 3746.

NOTE- DECLARED SINGLE-NUMBER NOISE EMISSION VALUE IS THE
SUM OF MEASURED VALUES AND THE ASSOCIATED UNCERTAINTY,
AND REPRESENT THE UPPER BOUNDARY OF THE VALUE LIKELY TO
OCCUR IN MEASUREMENTS.

SCHALLPEGEL ZU ISO 4871, IM ABSTAND, UNTER LAST: 78 dBA

	1	6	Fibre hopper			MD450-15		
	1	5	Vibrating unit			MD450-2		
	1	4	Weighing platform			MD450-6		
	8	3	Nordlock washer			NL20		
	8	2	Screw	12,9		M20x70		
	2	1	Motorvibrator			OLI MVE3000/1		
ANTAL Qty	DETALJ NR Item	BENÄMNING Description		MATERIAL Material		DIMENSION / DETALJRITNING / ART NR Dimension / Drawing no / Art no		VIKT Weight
RITAD Drawn	RE	DATUM Date	180130	SKALA Scale	1:20	KONTR Contr by	ERSATT AV Repl by	ERSÄTTER Repl
 TYP Layout MD450 counterclockwise				TOL ENL / Tol acc SS715 Medel		YTBEHANDLING / Surf trmt		
				SKARPA KANTER BRUTNA Sharp edges treated		CAD-FIL, Cad-file 000		
				RITN NR Draw no		MD450ccw-LO		
Trehörningsvägen 8, 313 96 Simlångsdalen-SWEDEN Tel+46(0)35-218500 Fax+46(0)35-218510 E-mail info@incite.se VAT Nr SE556584043501								