



# KRAMPE HAREX®


## KNOW WHY.

### Data Sheet | Fibres

Version 01/2023

# WIRE FIBRE

hooked ends

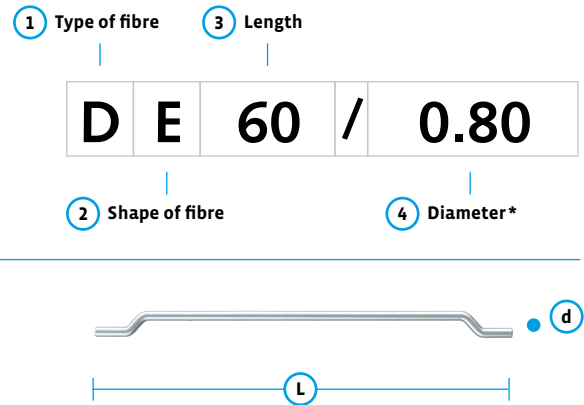

#### GEOMETRY

① Type of fibre	wire fibre
② Shape of fibre	hooked ends
③ Length	60 mm ± 10 %
④ Diameter*	0.80 mm ± 10 %
Cross section	round
Ratio (L/d)*	75

#### MATERIAL PROPERTIES

Material	zinc-plated steel
Material number	1,0313
Tensile strength	1,200 N/mm
Modulus of elasticity	210,000 N/mm

#### CERTIFICATIONS & SYSTEM APPROVALS

Standards	DIN EN 14889-1
Certifications (DIN)	EN ISO 9001:2015, EN ISO 50001




#### GENERAL FIBER INFORMATION

Quantity of fibres* (ref. 1kg)	~ 4,223
Total fiber length* (ref. 1kg)	253 m


#### DOSAGE

Minimum dosage (CE)	-
---------------------	---


#### DOSIERGERÄTE



Fibre Blower



Conveyor belt



Automatic dosing system

#### SERVICE+

We give advice and recommendations on the right fibre, we help with the configuration and selection of a suitable dosing device.

You can also find more information at: [krampeharex.com](http://krampeharex.com)

\* The fiber diameter can be 0.175 mm and/or 0.200 mm and/or 0.220 mm. Subject to change without notice. All specifications are only a general description of our products.

#### INFO

- Application examples
- > Fibres for Ultrahigh compressive fibre reinforced concrete for overlay
- > Precast concrete elements
- > Security applications

#### SAFETY



Protective glasses



Gloves

#### PACKAGING (Standard)



**Bags**  
20 kg Bag  
1200 kg Palett



**Big Bag**  
500 kg Big Bag  
1000 kg Palett

#### STORAGE



Keep Dry