





KRAMPE HAREX®

KNOW WHY.

Data Sheet | Fibres

VERSION 06/2026

SLIT SHEET FIBRE HOOKED ENDS

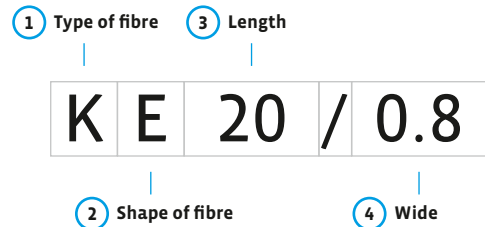

GEOMETRY

1 Type of fibre	slit sheet fibre
2 Shape of fibre	hooked ends
3 Length	20 mm ± 10 %
4 Wide	0.80 mm ± 10 %
b Thickness	0.5 mm ± 10 %
Cross section	rectangular

MATERIAL PROPERTIES

Material	steel
Material number	1.0330
Tensile strength	770 N/mm ²
Modulus of elasticity	210.000 N/mm ²

CERTIFICATIONS & SYSTEM APPROVALS


Standards	DIN EN 14889-1
Certifications (DIN)	EN ISO 9001:2015, EN ISO 50001




DOSAGE

Minimum dosage (CE)	-
---------------------	---


DOSING DEVICES



Fibre Blower



Conveyor belt



Automatic dosing system

SERVICE+

We offer advice and recommendations on the right fibre, help with the configuration and selection of a suitable dosing device.

You can also find more information at: krampeharex.com

Subject to change without notice. All specifications are only a general description of our products.

INFO

Application examples
> Floor screed

SAFETY



Protective glasses



Gloves

PACKAGING



Bags
20 kg Bag
900 kg Palett



Boxes
20 kg Karton
900 kg Palett



Big Bag
500 kg Big Bag
1000 kg Palett

STORAGE



Keep Dry