



KRAMPE HAREX®



KNOW WHY.

Data Sheet | Fibres

Version 07/2022

SLIT SHEET FIBRE

hooked ends

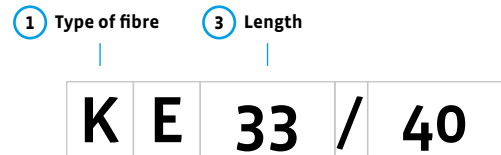

GEOMETRY

1 Type of fibre	slit sheet fibre
2 Shape of fibre	hooked ends
3 Length	33 mm ± 10 %
4 Wide	40 mm ± 10 %
Cross section	rectangular

MATERIAL PROPERTIES

Material	steel
Material number	1,0330
Tensile strength	390-540 N/mm ²
Modulus of elasticity	210,000 N/mm ²

CERTIFICATIONS & SYSTEM APPROVALS


Standards	DIN EN 14889-1
Certifications (DIN)	EN ISO 9001:2015, EN ISO 50001




DOSAGE

Minimum dosage (CE) 20 kg/m³


DOSING DEVICES



Fibre Blower



Conveyor belt



Automatic dosing system

SERVICE+

We give advice and recommendations on the right fibre, we help with the configuration and selection of a suitable dosing device.

You can also find more information at: krampeharex.com

Subject to change without notice. All specifications are only a general description of our products.

INFO

Application examples
> Floor screed

SAFETY



Protective glasses



Gloves

PACKAGING



Bags
20 kg Bag
900 kg Palett



Boxes
20 kg Karton
900 kg Palett



Big Bag
500 kg Big Bag
1000 kg Palett

STORAGE



Keep Dry